

Use Instructions

- Move desk into desired position and lock casters to prevent movement.
- Turn the tension knob counter-clockwise to unlock height adjustment.
- Place hands on both sides of the top and pull up to lift; press down to lower the height.
- Turn tension knob clockwise until snug to secure the table height.
- Pull down tabs on the T-bar to unlock tilting function. Press up on tabs to lock the desk.

STEP 4.

Pull out the tabs on **MOUNT (E)** and tilt the **T-BAR (D)** up.

Push the tabs back down to lock the table.

STEP 5.

Fit BASE SLEEVE (I) through bottom of BASE (C). Hold in place with HEX KEY (M).

Attach T-BAR (D) with BASE SCREW (K) using second HEX KEY (M). Repeat for all base screws.

STEP 6.

Attach SIDE TABLE (B) to T-BAR (D) with SIDE TABLE SCREW (J) using HEX KEY (M).

Make sure all screws are tight and turn desk onto wheels.

Congratulations! Enjoy your new Mobile Desk Cart!

Safety


Make sure to secure the locks when using the desk Do not place more than 20 lbs. on the desk top

Customer Service Information

Telephone: (800) 323-5565
Fax: (310) 533-3899
Hours: 8:30 AM – 4:30 PM (PST)
Email: Support@SevilleClassics.com
Homepage: www.SevilleClassics.com

seville classics®

Tilting Sit-Stand Mobile Desk Cart with Mouse Pad Table

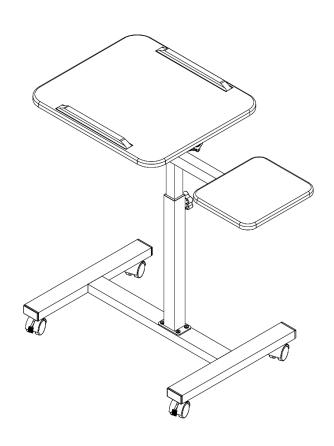

Model: WEB664, OFF65993B

Thank you for choosing Seville Classics! We hope that you enjoy your new mobile desk cart. Please read through this user guide for parts list, assembly instructitions, frequently asked questitions and contact informatition.

062019 062019


Parts List

I. Base sleeve (4) A. Main table (1) B. Side table (1) J. Side table screw (2) C. Base (1) K. Base screw (4) D. T-Bar (1) L. Knob (1) E. Mount (1) M. Hex key (2) F. Small cap (2) N. Wrench (1) G. Locking caster (2) O. Top screw (6) H. Caster (2)

Please make sure you have all the parts on this list.

If you're missing parts, contact us for replacements at (800) 323-5565 or send an email to Support@SevilleClassics.com

Assembly Instructions




STEP 1.

Screw pair of CASTERS (H) into open side of BASE (C) using WRENCH (N).

Repeat on opposite side with **LOCKING CASTERS (G)**.

Press **SMALL CAPS (F)** into ends of **T-BAR (D)**.

Tighten KNOB (L) against t-bar.





STEP 2.

Install MOUNT (E) to the base of MAIN TABLE (A) with TOP SCREWS (O) using HEX KEY (M).

IMPORTANT!

<u>Do not overtighten screws.</u> Overtightening screws may damage surface of table top.





1

2