


Kennel door mounting instructions

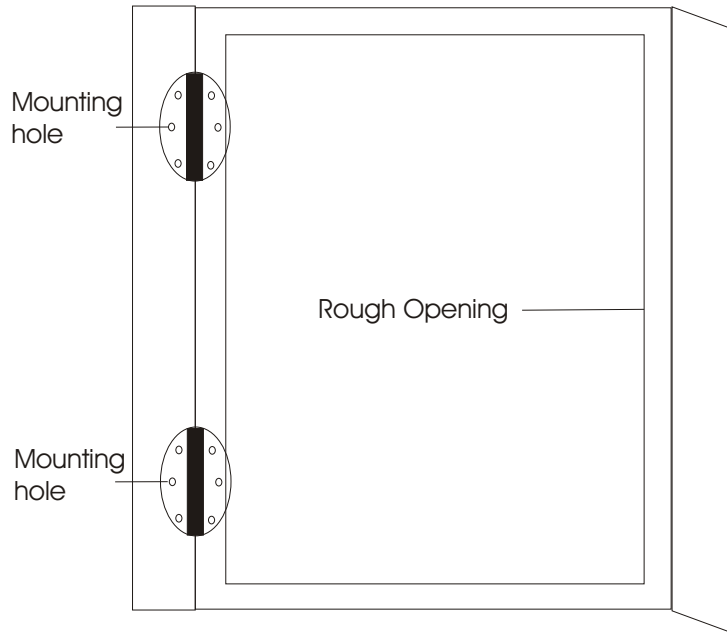

Door Should be mounted on flat surface for tight closure to secure kennel from weather.


Use #10 pan head screw, 1 1/4" or 1 1/2" long.

Position door with at least 1/2" above and below opening.

On mounting strip side, overlap 1/8" to 1/4". This will allow at least 3/4" on flange side.

Keep door screwed tight to casing at all times to protect door from excessive wear.

Kennel door mounting instructions

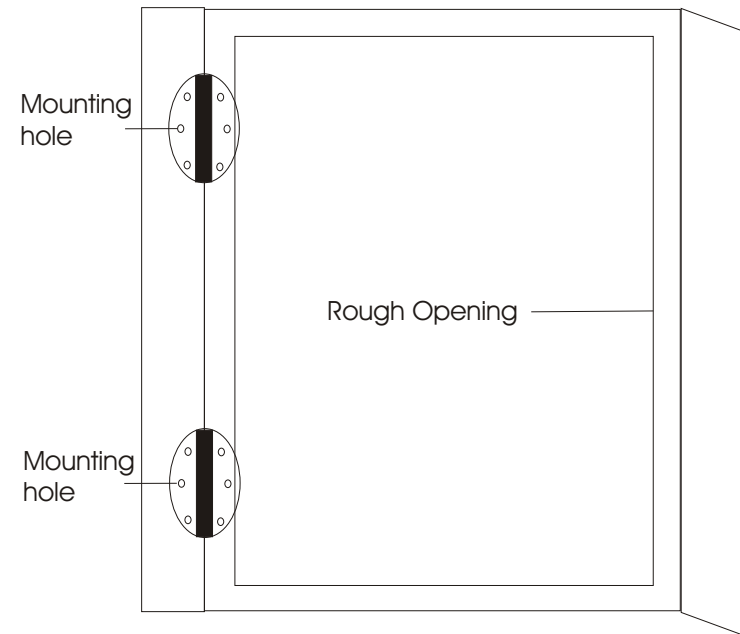

Door Should be mounted on flat surface for tight closure to secure kennel from weather.

Use #10 pan head screw, 1 1/4" or 1 1/2" long.

Position door with at least 1/2" above and below opening.

On mounting strip side, overlap 1/8" to 1/4". This will allow at least 3/4" on flange side.

Keep door screwed tight to casing at all times to protect door from excessive wear.