

4 V E N U E


EDITION

 **surface** materials
The ultimate in interior finish products.


de **nōvō**® WALL

PHYSICAL PROPERTIES


Width: 52"/54" (132/137 CM) Vinyl Wallcovering, Type II **Weight:** 20 oz Per Lineal Yard, 13.3 oz Per Square Yard
Packaging: All patterns are stocked in 30 yard bolts. Must be ordered in 15 yard increments.



DN-VS4-05



DN-VS4-04



DN-VS4-49



DN-VS4-48



DN-VS4-44



DN-VS4-51




DN-VS4-11



DN-VS4-31



DN-VS4-42




DN-VS4-43



DN-VS4-34



DN-VS4-35



DN-VS4-06



DN-VS4-45



DN-VS4-02



DN-VS4-33




DN-VS4-46



DN-VS4-18



DN-VS4-19




DN-VS4-20



DN-VS4-50




DN-VS4-03



DN-VS4-23



DN-VS4-24



DN-VS4-25



DN-VS4-10




DN-VS4-17




DN-VS4-53




DN-VS4-39



DN-VS4-30




DN-VS4-28



DN-VS4-32




DN-VS4-22



DN-VS4-40




DN-VS4-52




DN-VS4-12



DN-VS4-47



DN-VS4-13



DN-VS4-14



DN-VS4-29



DN-VS4-01



DN-VS4-41




DN-VS4-16



DN-VS4-27



DN-VS4-38




DN-VS4-09




DN-VS4-54




DN-VS4-15




DN-VS4-08




DN-VS4-07




DN-VS4-21



DN-VS4-26



DN-VS4-37



DN-VS4-36

DN-VS4-01



DN-VS4-03



DN-VS4-02




DN-VS4-04



DN-VS4-05



DN-VS4-07

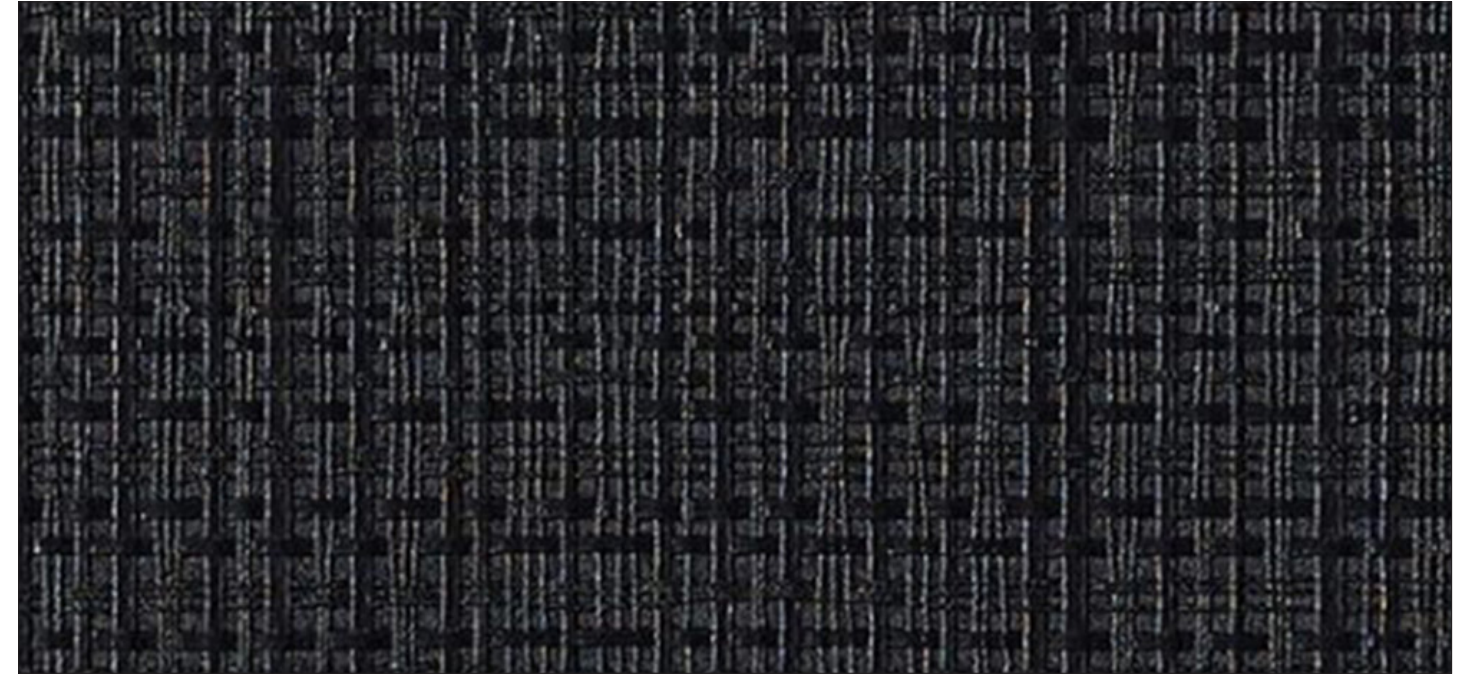

DN-VS4-06



DN-VS4-08



DN-VS4-09



DN-VS4-11



DN-VS4-10



DN-VS4-12



DN-VS4-13



DN-VS4-15



DN-VS4-14



DN-VS4-16



DN-VS4-17



DN-VS4-19




DN-VS4-18



DN-VS4-20



DN-VS4-21

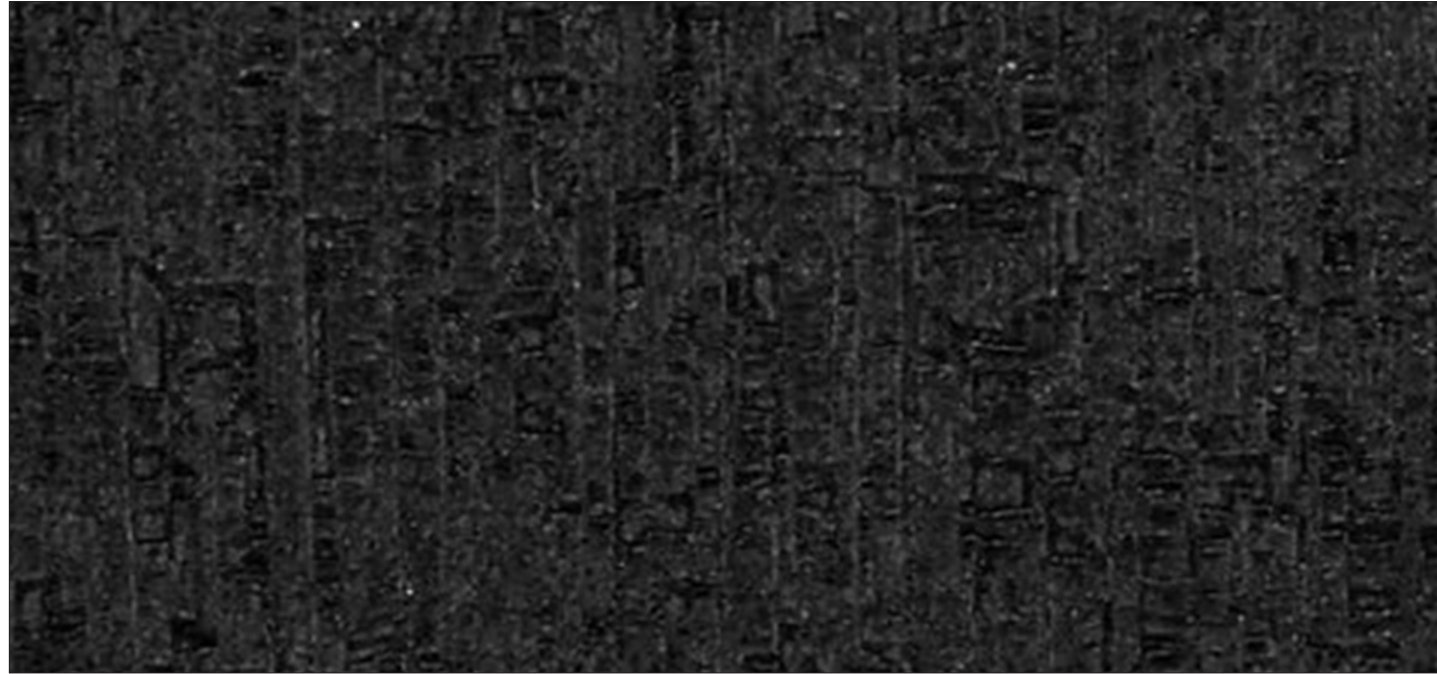

DN-VS4-23



DN-VS4-22



DN-VS4-24




DN-VS4-25



DN-VS4-27



DN-VS4-26

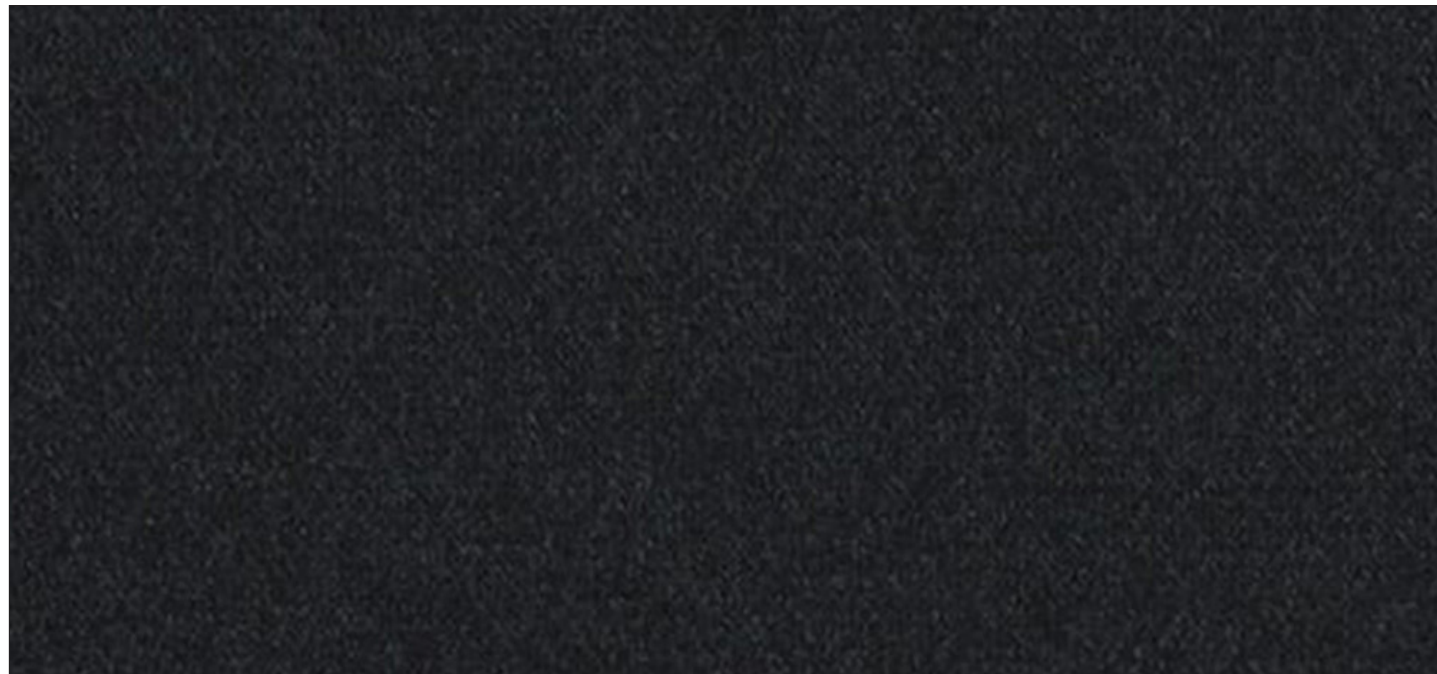

DN-VS4-28




DN-VS4-29



DN-VS4-31



DN-VS4-30

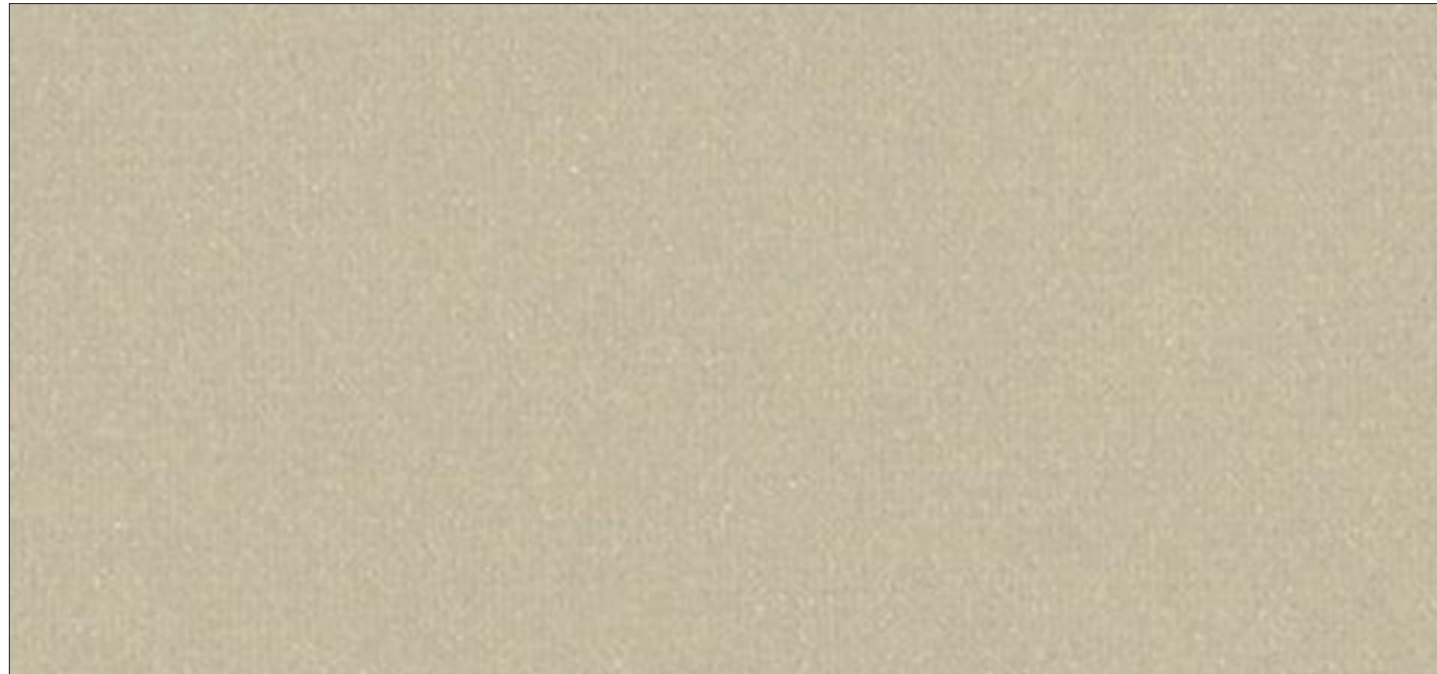

DN-VS4-32




DN-VS4-33



DN-VS4-35



DN-VS4-34

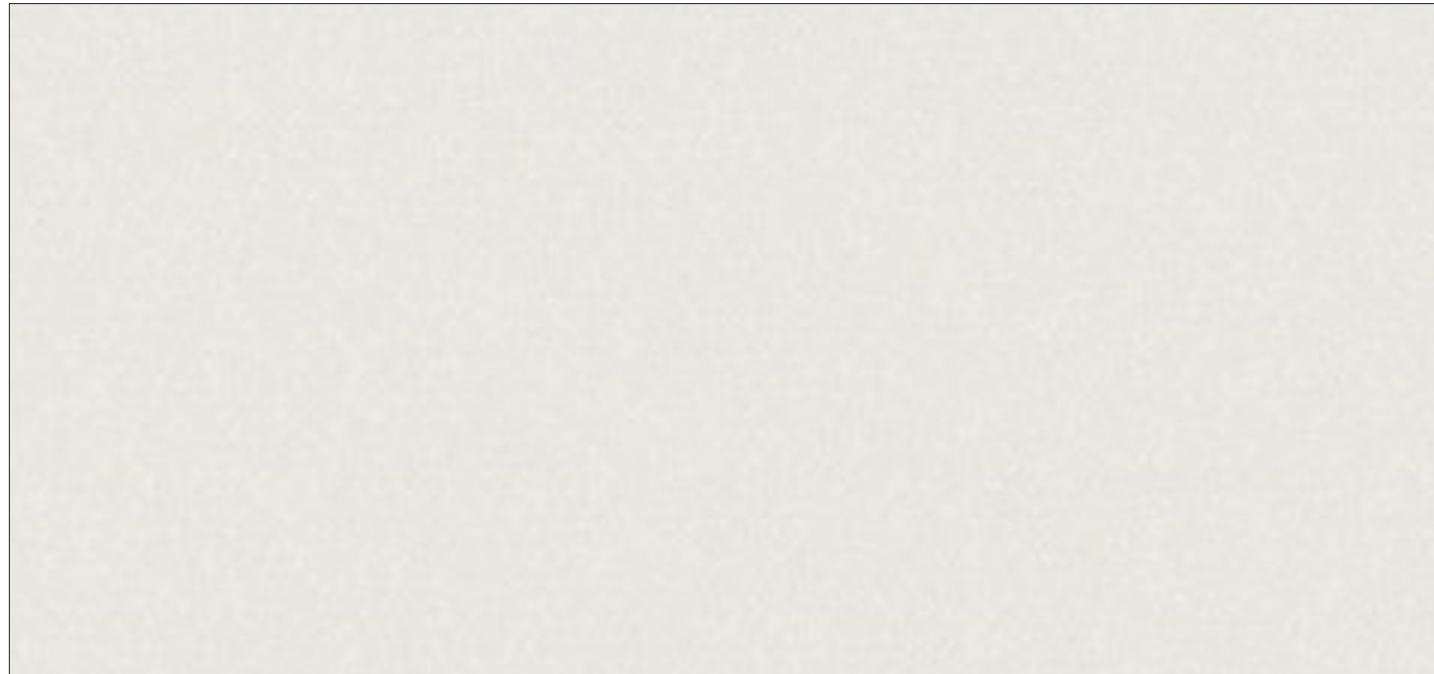


DN-VS4-36




DN-VS4-37




DN-VS4-39

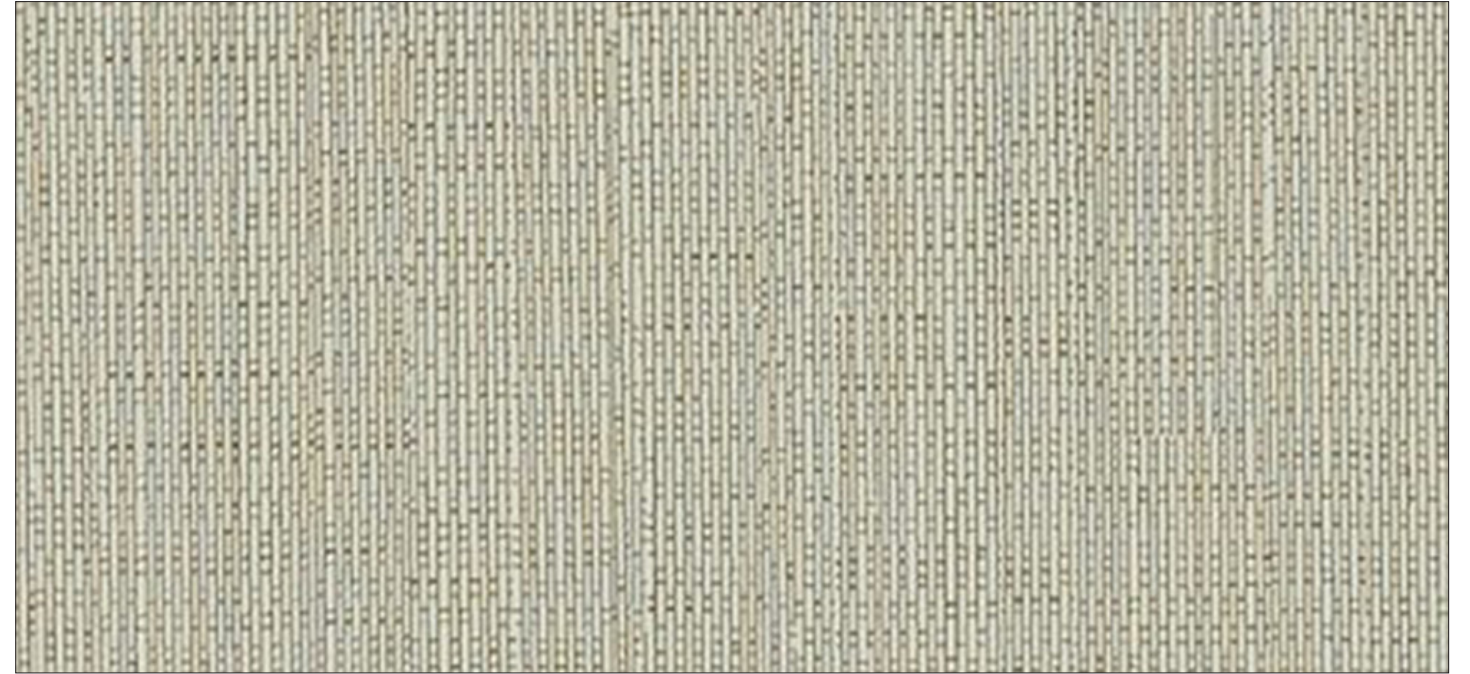

DN-VS4-38

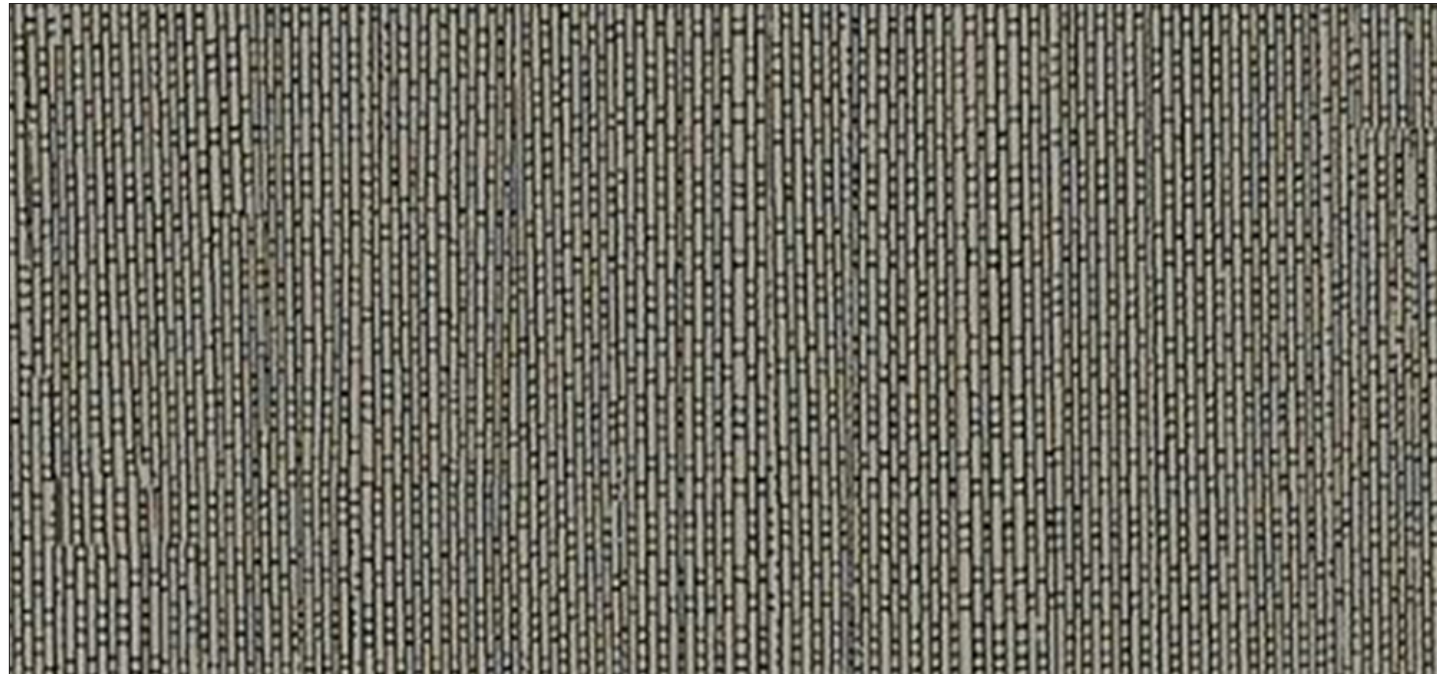


DN-VS4-40

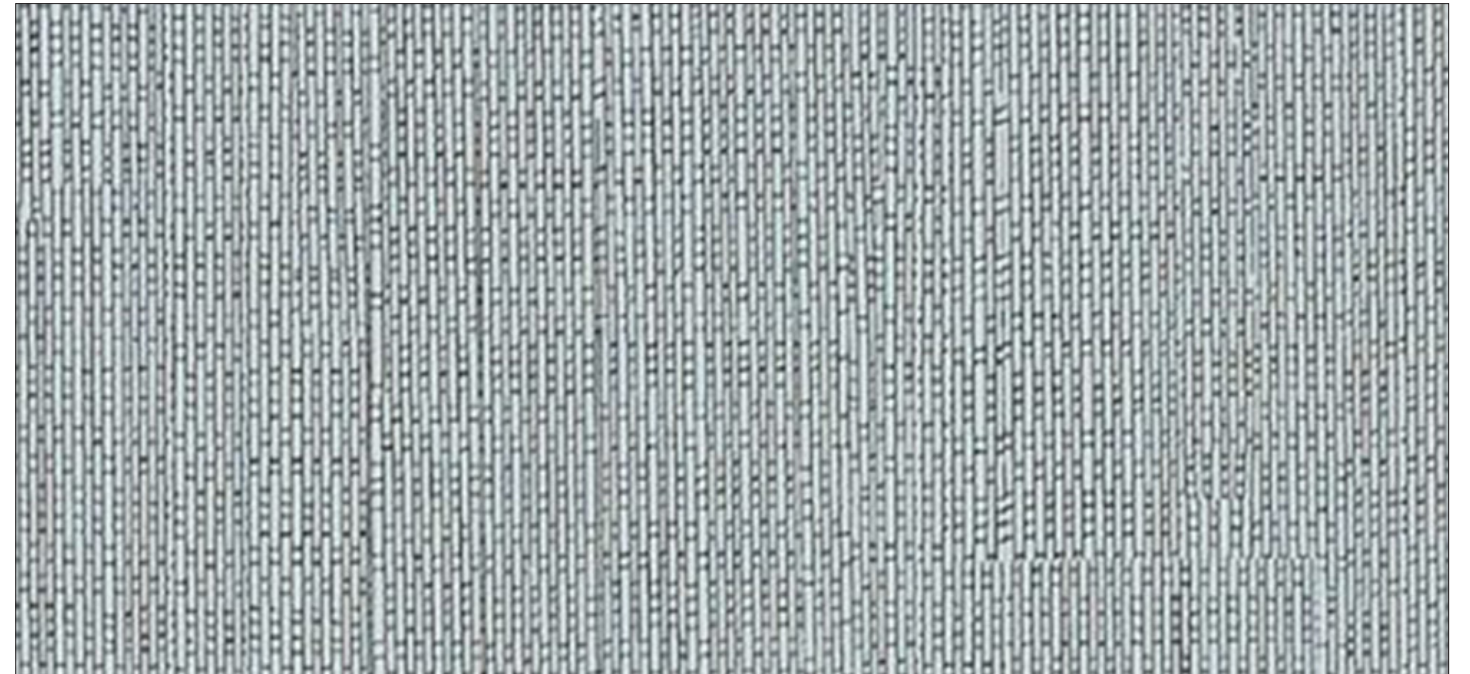

DN-VS4-41



DN-VS4-43

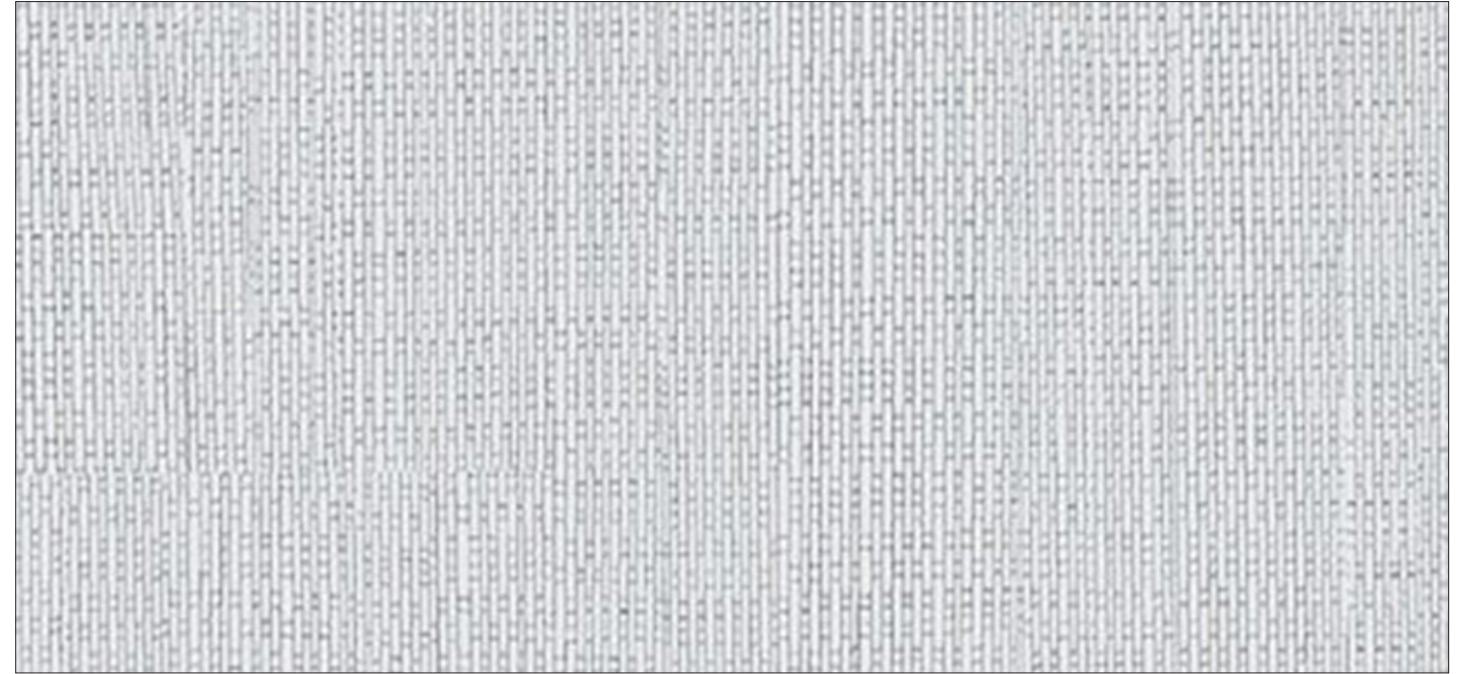

DN-VS4-42



DN-VS4-44



DN-VS4-45



DN-VS4-47



DN-VS4-46



DN-VS4-48



DN-VS4-49



DN-VS4-51



DN-VS4-50



DN-VS4-52



DN-VS4-53



DN-VS4-54



SPECIFICATIONS

LOW VOC TYPE II

FIRE HAZARD CLASSIFICATION RESULTS:

Tested in accordance with ASTM E-84 Tunnel Test Class "A" Fire Rated.

In addition, this product meets Type II CCC-W-408A through D & W-101 requirements for Washability, Scrubbability, Abrasion Resistance and Stain Resistance.

ENVIRONMENT & HEALTH:

Meets California Section 01350 IAQ test requirements for wallcovering.

Can contribute to LEED EQ 4.1 point for low-emitting materials, adhesives, and sealants, if used with low VOC adhesives

Can contribute to LEED MR 5.1 point for regional materials.

ANTI-MICROBIAL FEATURES:

This product is intended for use in buildings that are properly designed and maintained to avoid moisture infiltration, condensation and/or accumulation in wall cavities and wall surfaces, particularly in warm, humid climates.

BREATHE FREE MICRO-VENTING AVAILABLE UPON REQUEST:

Breathe Free Micro-vented wallcovering from Denovo Wall can be used to help control un-wanted moisture inside a building envelope.

LIMITED WARRANTY:

5 year warranty against manufacturing defects. Additional information is available at www.denovowall.com