


USER GUIDE

**Welcome! Let's set up your
Solar 4G camera.**

Contents:

- 2** What's in the box?
- 3-4** The beginning
- 5** Getting to know your camera
- 6** Inserting 4G sim card
- 7** Inserting Micro SD card
- 8** Solar Panel
- 9-15** Connecting to the app
- 16-17** Using the app (brief overview)
- 18-19** Human tracking & alarm
management

WHAT'S IN THE BOX?

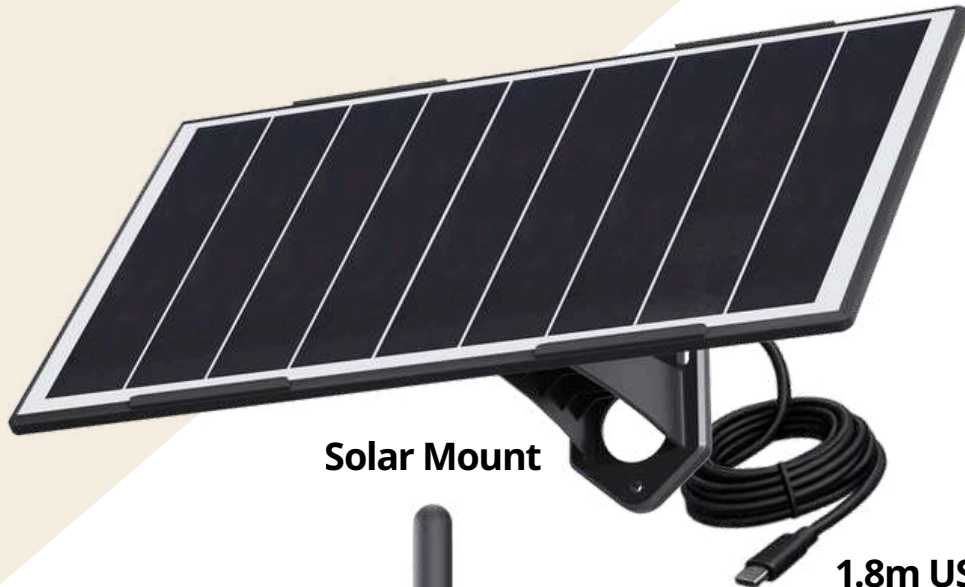

Solar Mount

1.8m USC-C Cable



4G Multi-SIM



7x Plug & Screws



2x Solar Mount Screws



4G Camera



1m USB Extension

Image not to scale
Some accessories may vary in appearance

THE BEGINNING

1. Set your cameras up indoors

We highly recommend setting your camera up indoors first.

If there is any troubleshooting/resetting that is required when configuring your camera, it's much easier to when the camera is in your hands at ground level - rather than hanging off a ladder!

2. Download the app

The app can be installed via the Google Play Store or the Apple App Store by searching CamHipro.

You can install the app on as many devices as you wish.



[CamHipro App Store](#)



[CamHipro Play Store](#)



THE BEGINNING

3. Activate your 4G SIM card

Our Multi-SIM card card will automatically connect you to the best 4G network in your area. This can save with a lot of hassle find the best provider in your area, and also if a mast goes down.

You can activate your Multi-SIM here:
www.ruralview.uk/activate

The SIM can take two hours to activate.


Our cameras are unlocked, and you can use any UK sim card in them. If you're using a different SIM card, please follow the instructions specific to your provider and contact them directly if you require any support with this.

You will require the smallest SIM cut-out for our cameras. This is a nano SIM.



GETTING TO KNOW YOUR CAMERA


Your Camera:

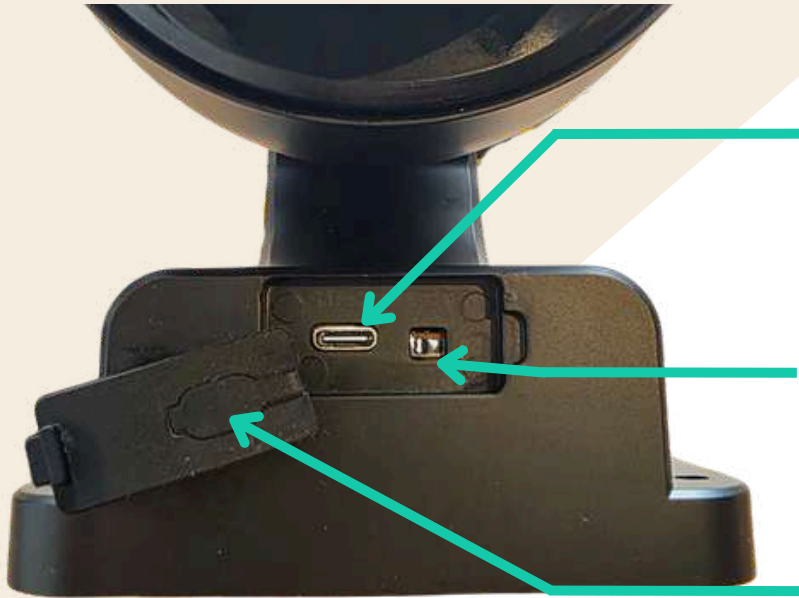

USB-C Charge Port. This is where you connect your solar panel, or you can charge via mains if required.

On/Off Switch. Use this to toggle your camera's power off and on.

USB Bung. Open this when inserting the solar panel charger into camera.

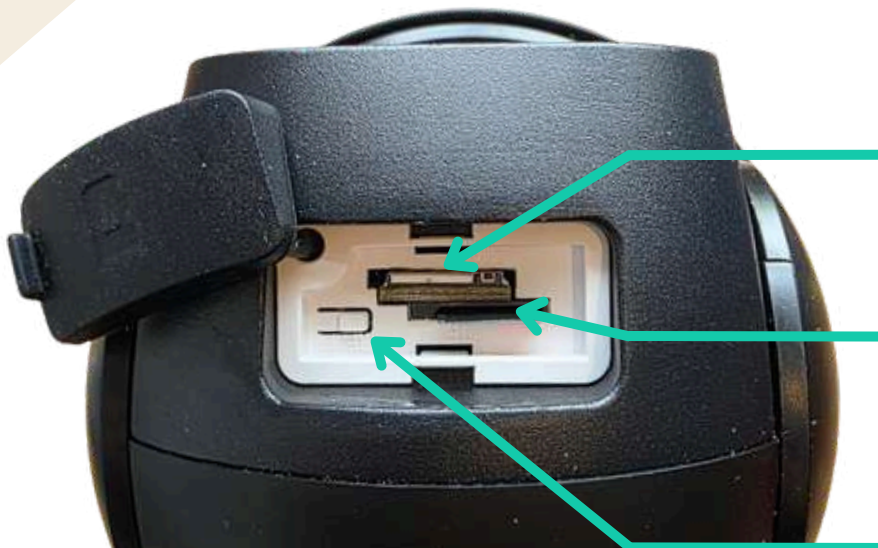

4G SIM Slot. Insert your 4G SIM card here.

SD Card Slot. Insert your SD card here.

Factory Reset Button. Press and hold to reset camera to factory defaults.



Ensure the rubber bung's are reinserted.

INSERTING 4G SIM CARD

Inserting your 4G SIM card:

To connect your camera to the internet for remote access, you must insert an activated 4G SIM card.

A. You can find the SIM slot on the underside of the camera. Remove rubber bung to reveal the slot.

B. Insert 4G SIM card as shown below. The slot is spring-loaded. You will feel a click when successfully inserted.



**Ensure the rubber bung is reinserted.
SIM will slightly protrude when inserted.**

INSERTING SD CARD

Inserting your SD Memory card:

To be able to watch recorded footage, you must insert an SD card. The maximum support is 256GB.

A. You can find the SD slot on the underside of the camera. Remove rubber bung to reveal the slot.

B. Insert the SD card as shown below. The slot is spring-loaded. You will feel a click when successfully inserted.



**Ensure the rubber bung is reinserted.
SD card will slightly protrude when inserted.**

SOLAR PANEL

Make up solar panel:

Find the two solar mount screws and use them to attach the mounting arm to the solar panel.



Adjustment screws


You can use these screws to change the angle of the solar panel.



Ensure solar panel is installed south-facing in a completely unshaded spot for best performance.


CONNECTING TO THE APP

After you have activated your SIM card and inserted it into your camera, open the CamhiPro app you downloaded previously.

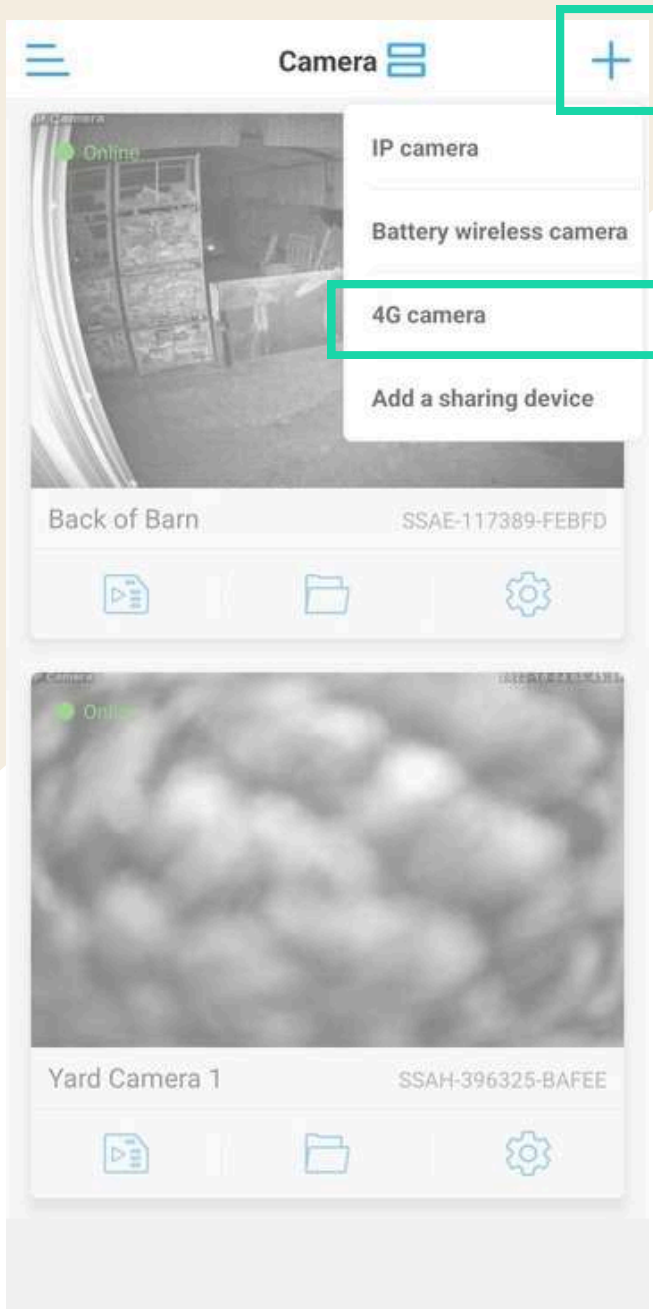


A. Click + top right of the apps home screen and select 4G camera.

CONNECTING TO THE APP

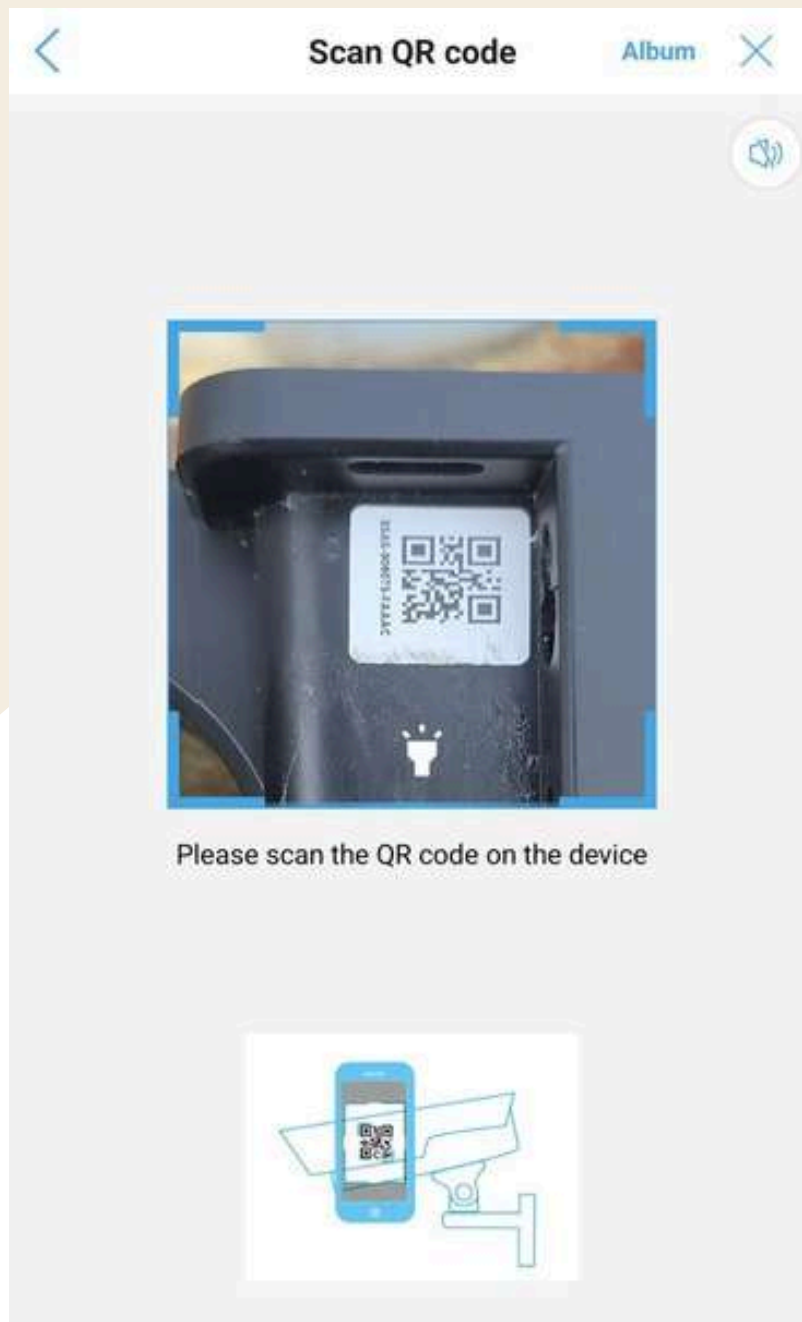

B. You will need to scan the UID of your camera. This can be found on the side of the mounting arm.

CONNECTING TO THE APP

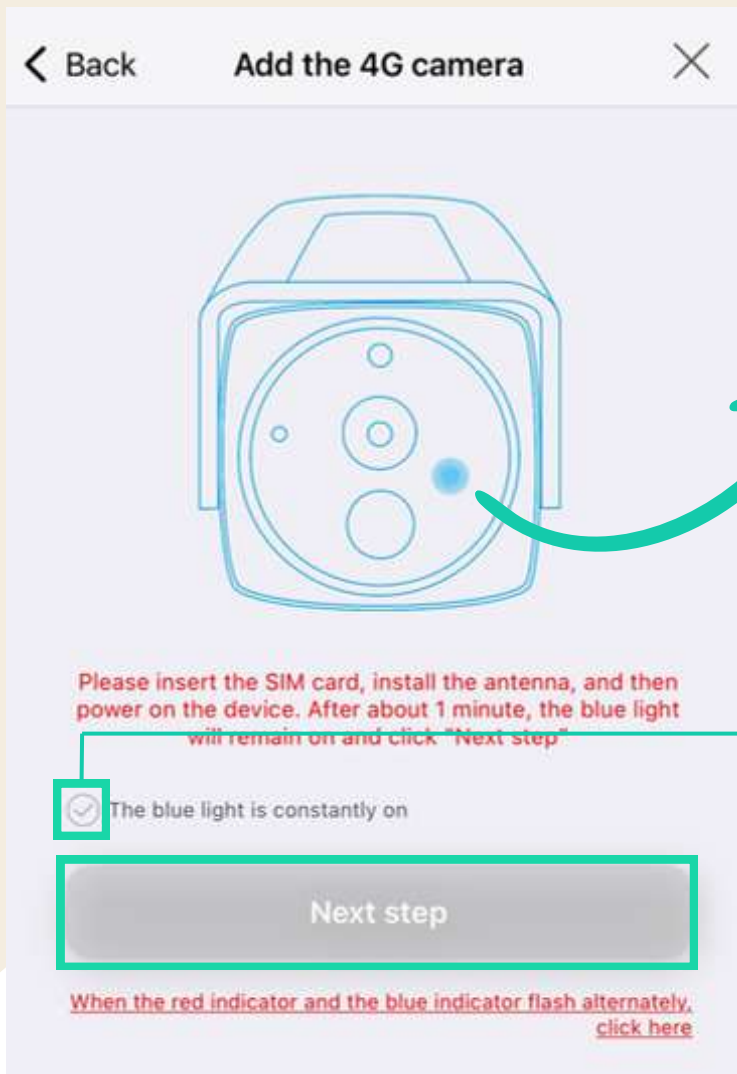

Ensure you check this box to continue with setup

C. Wait for **solid blue or flashing blue light**, select the checkbox, then move onto the next step.




No Solid or Flashing Blue Light?


- **Just activated your SIM?** Wait for two hours for the SIM to fully activate. Then turn the camera off and on and try again.
- **Poor signal?** If your camera is in a poor signal area or indoors, try moving it somewhere else to check for a better signal.

CONNECTING TO THE APP

D. The cameras will then connect to the app. May take 1-2 minutes.

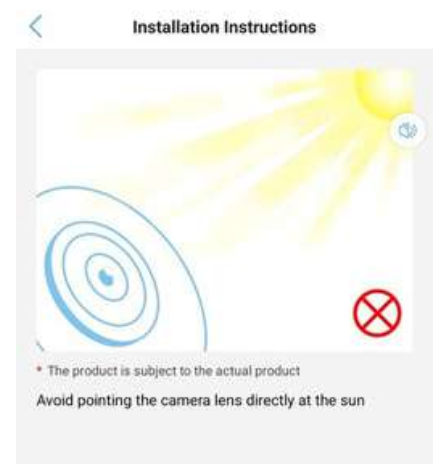

E. Run through the setup wizard by clicking next step.

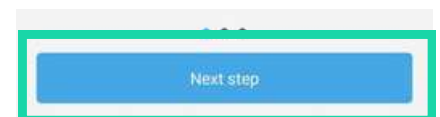


? Network diagnostics?

If the signal isn't great where you are, you may get a diagnostics screen. This can mostly be ignored; you may experience a slower connection compared to better signal areas.



CONNECTING TO THE APP

F. Enter a name for your camera. You can change this later if required. Click confirm when complete.

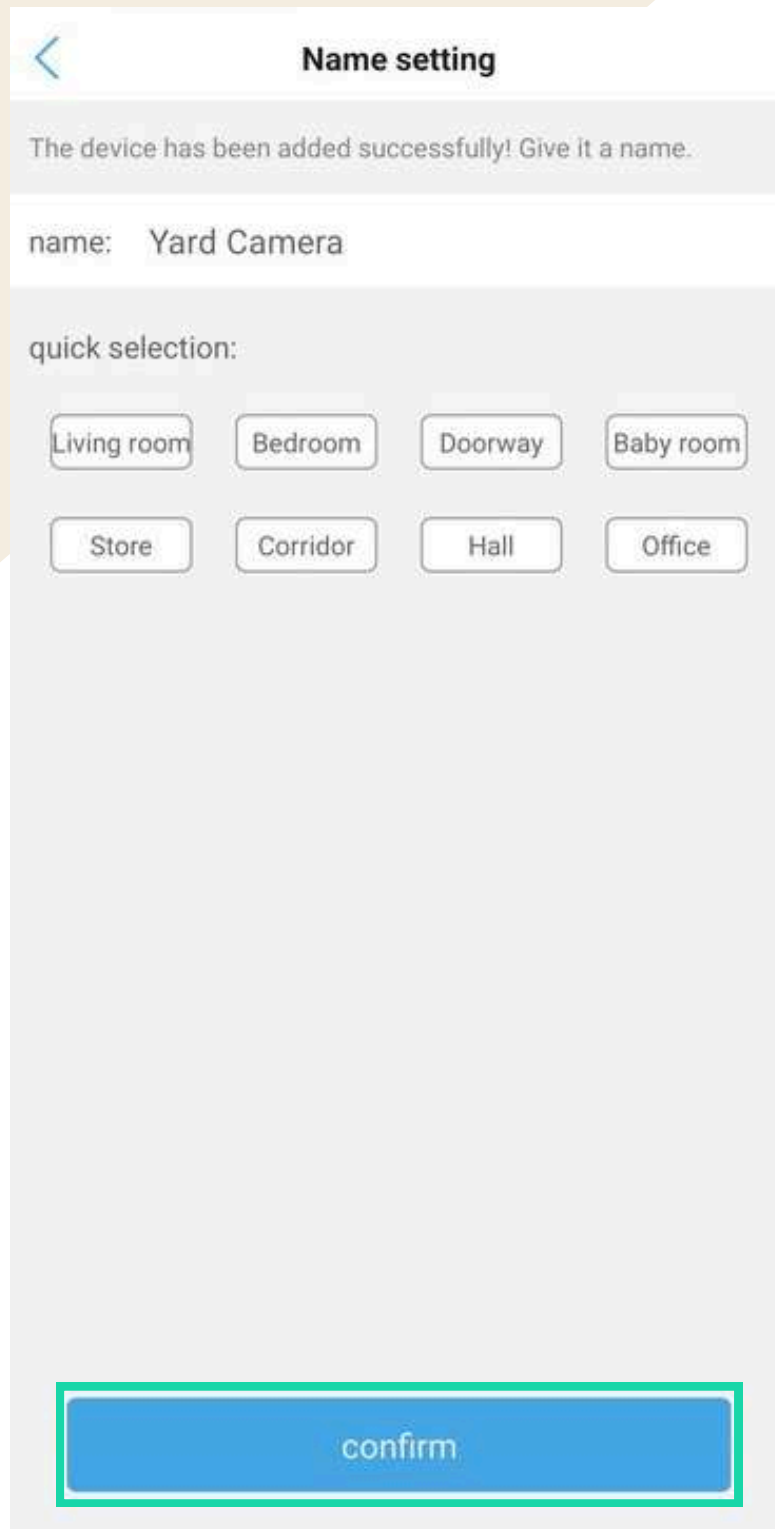

< **Name setting**

The device has been added successfully! Give it a name.

name: Yard Camera



quick selection:

Living room	Bedroom	Doorway	Baby room
Store	Corridor	Hall	Office

confirm

CONNECTING TO THE APP

G. The camera should now be online in the app. Click anywhere on the camera and you'll be prompted to change the password.

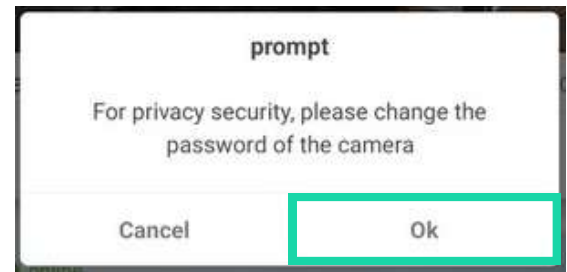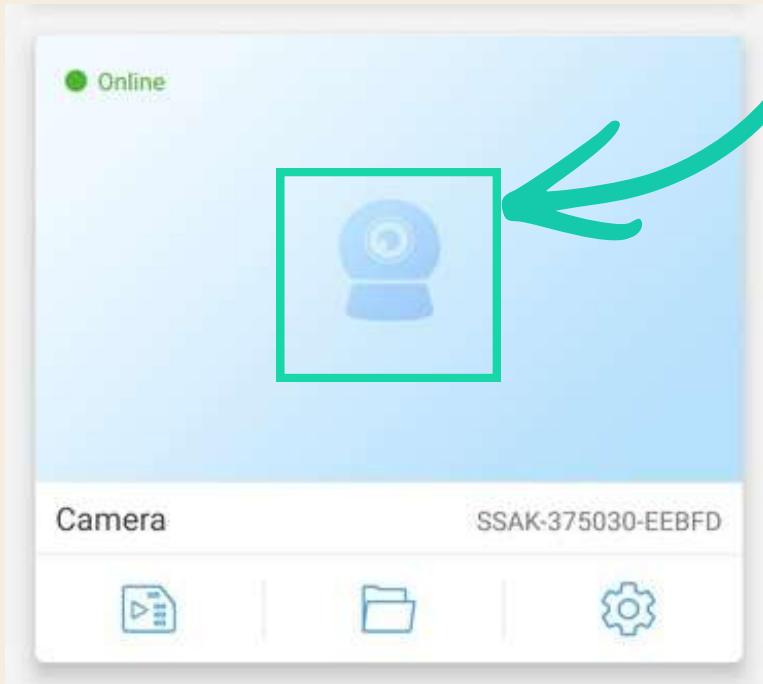

H. Enter your own password and click apply.

< Set Password

New Passwo... ..

Confirm Pass... ..

The password must contain more than 8 letters and numbers

☐ show password

Apply



Use password card to remember password.



This password saves to the camera and will be used when adding the camera to any other devices.

CONNECTING TO THE APP

I. After the password is set, and the camera is back online, click on it again and you'll be prompted to change the time.

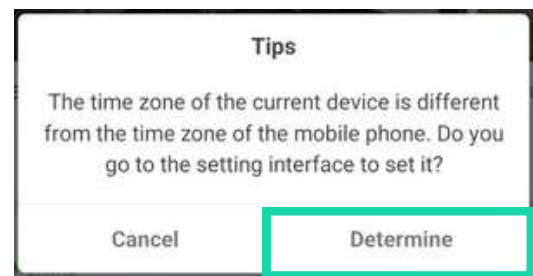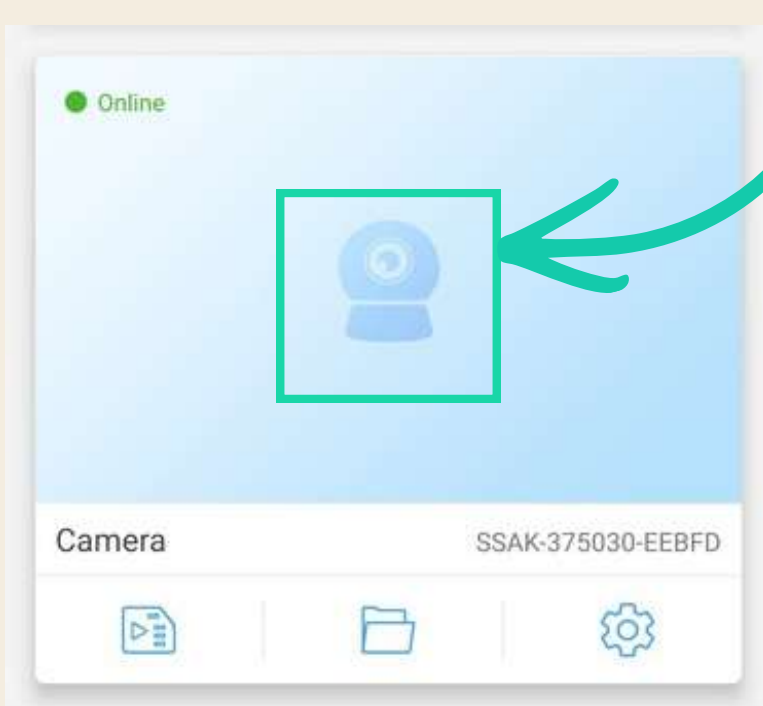

Device time
2026-06-01 17:17:09

Sync with phone time

Device time zone
GMT+0:00 Europe/Dublin



summer time




Phone time zone
GMT+1.0

Apply

J. **Do not sync with phone.**

Adjust the timezone to Europe/Dublin, select summer time or daylight if in BST. **Click Apply and restart the camera when prompted.**

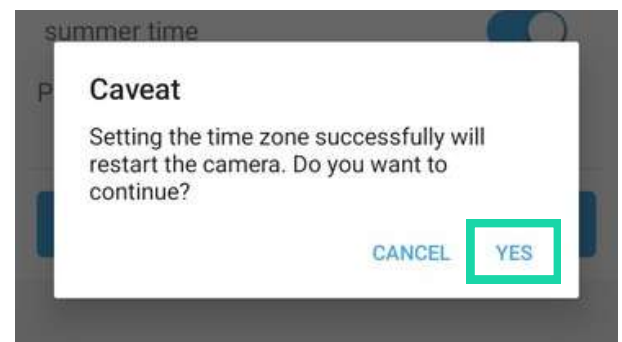


THE BASICS

First time viewing your camera.

Once the app is successfully connected to WiFi, you may see the default image, or a snap shot of what the camera last saw.

To get a live view, you will need to click on the image.

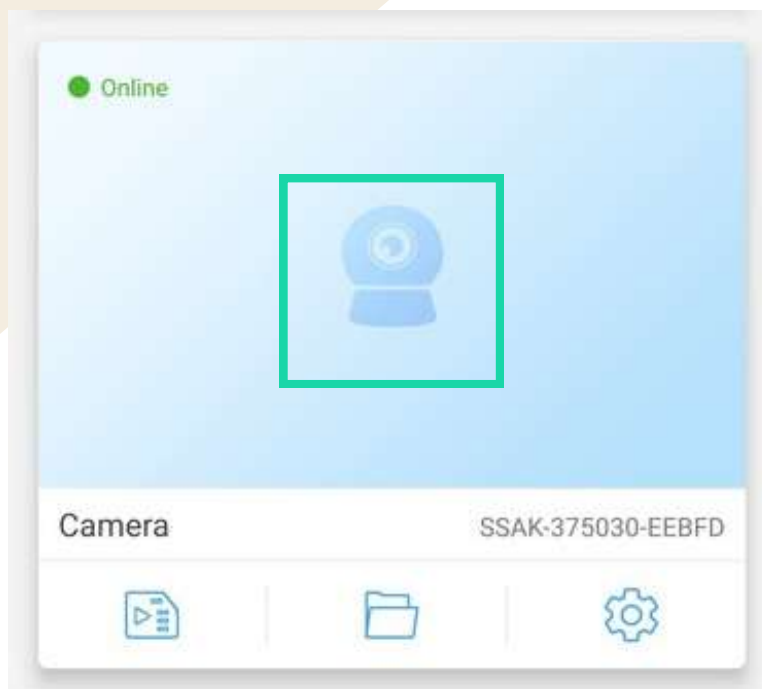


**The camera will never show a live view on the home screen.
You need to click on the camera to live stream.**

THE BASICS


F.

On the app homepage, click on your camera. You are now viewing a live stream of your camera.

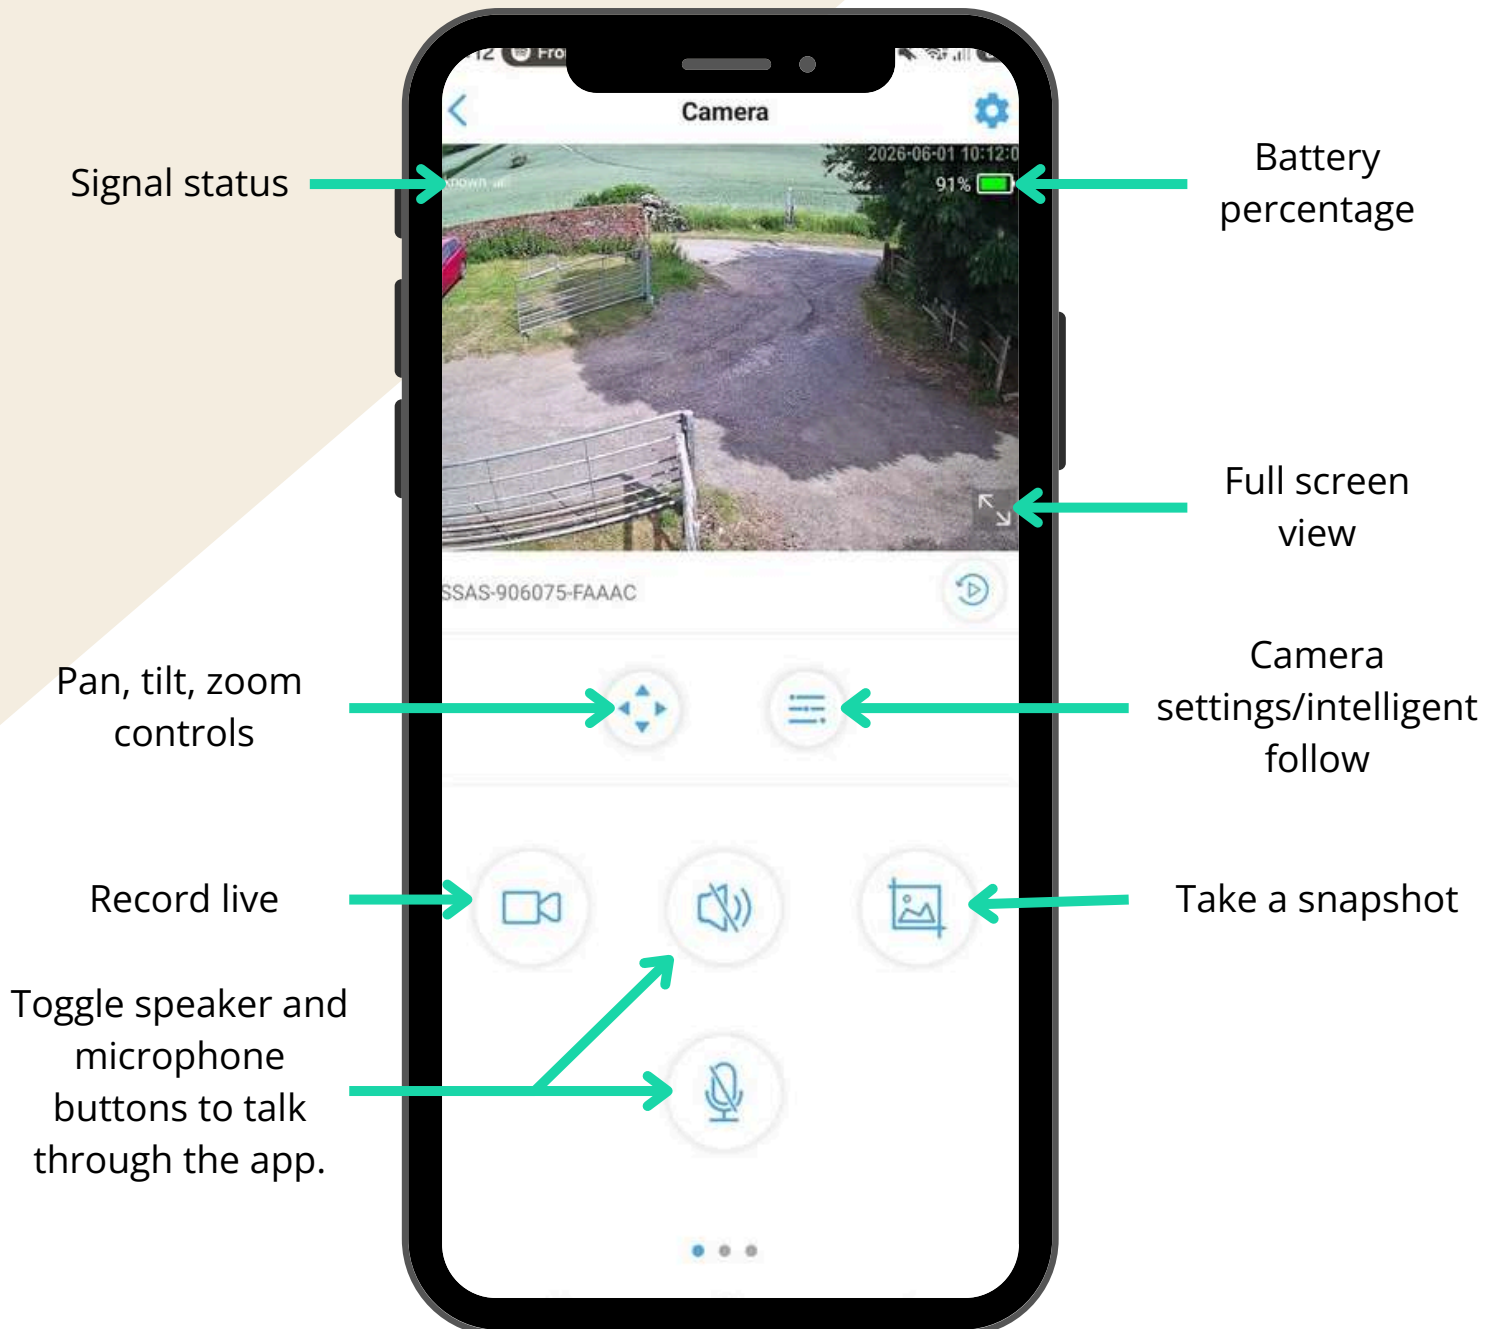


HUMAN TRACKING & ALARM MANAGEMENT

Turn on human tracking

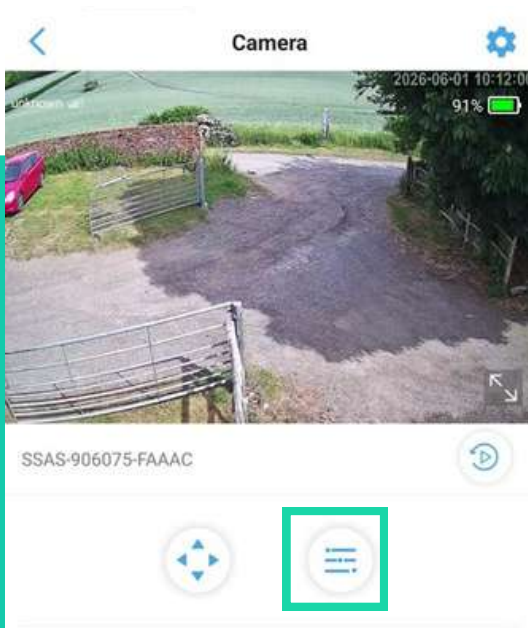


Click on the three lines or swipe through the icons to bring up the intelligent tracking setting.

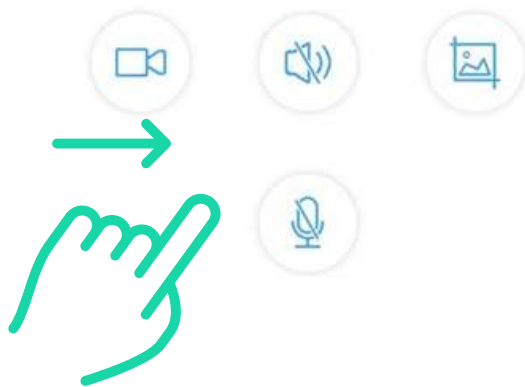

Click on the Intelligent Tracking option to turn it on.


Once tracking has finished, the camera will automatically move back to the last set location.

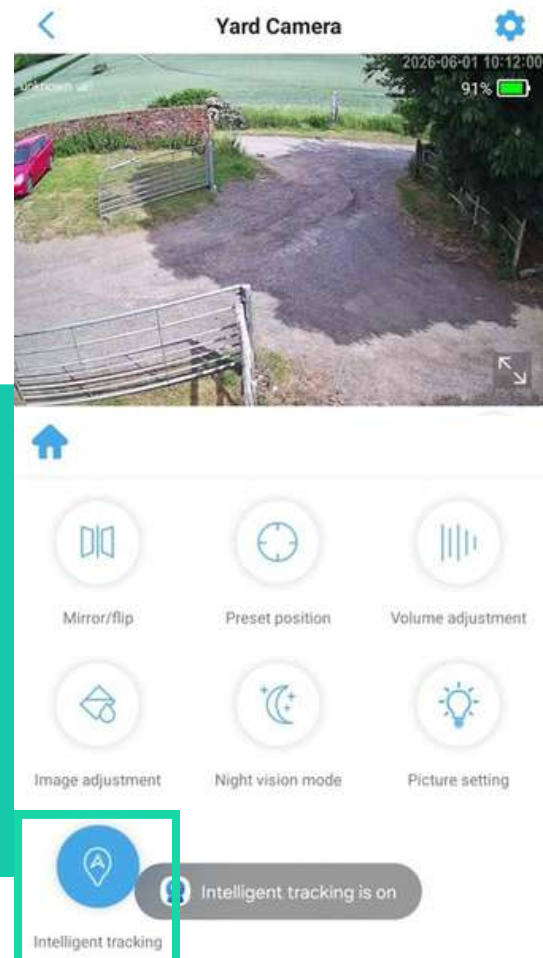


HUMAN TRACKING & ALARM MANAGEMENT

Alarm Management

Navigate to settings 

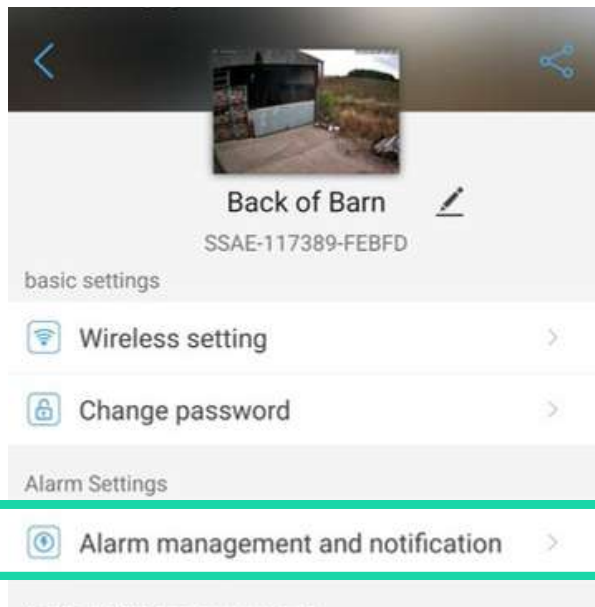

A. Find 'Alarm management and notification'

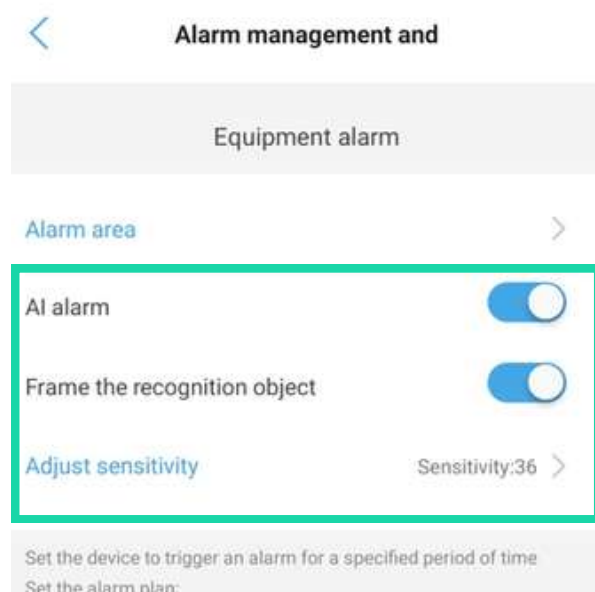

B. Enable AI alarm and Frame the recognition object by switching both options on.


Adjust the sensitivity accordingly.





The more the alarm is triggered, the more battery it will use. ONLY DETECTS HUMANS.

HUMAN TRACKING & ALARM MANAGEMENT

Alarm Management

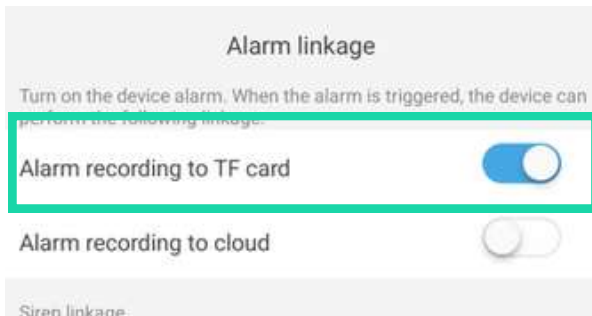

C. Enable **Alarm recording to TF card** to save footage when the alarm is triggered.

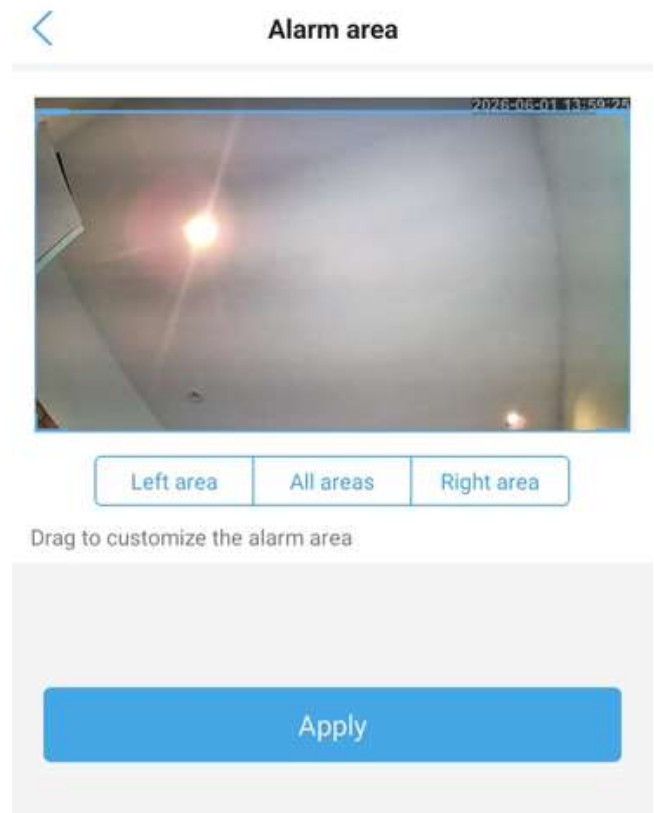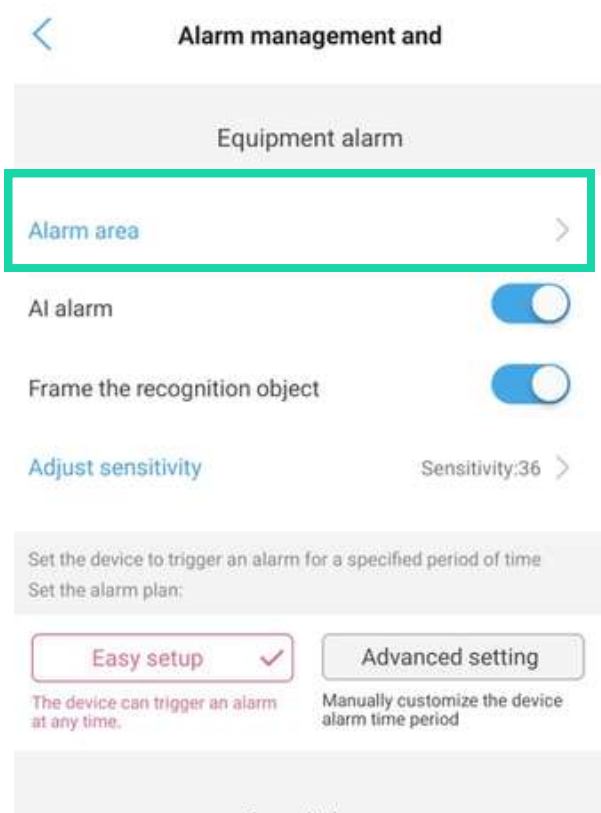

D. The alarm area can be adjusted to help prevent false alarms or remove areas where no detection is needed.