




RUGER 10/22

INSTALLATION INSTRUCTIONS

Thank you for purchasing this Timney Trigger. It has been designed and manufactured to provide you with a lifetime of dependable service. Each trigger is hand tested and calibrated on an action specific to your platform before leaving our factory. **Please read these instructions fully** before you begin installing the trigger, you'll be glad you did.

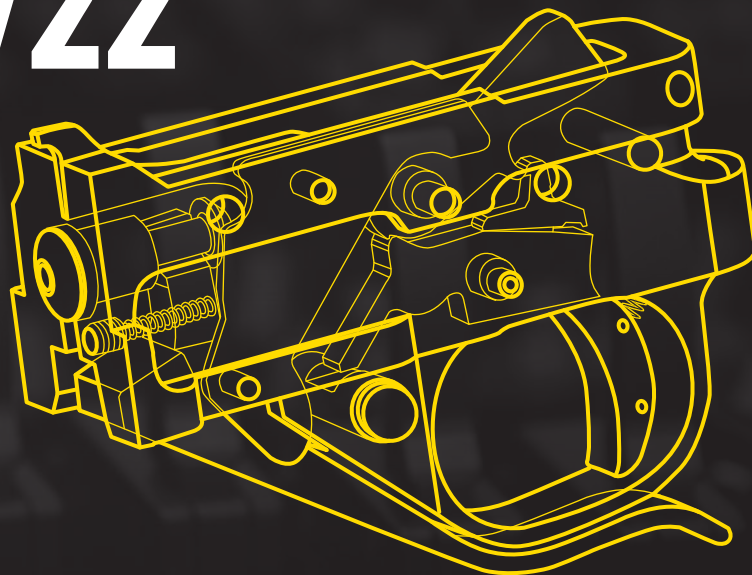

TOOLS NEEDED:



Straight Punch



5/32" Hex Wrench &
9/64" Hex Wrench



Screwdriver with
Slotted blade



Small Hammer

TIMNEY TRIGGER GUARANTEE

Material and workmanship: This Timney trigger has been carefully inspected, tested and adjusted to give a lifetime of dependable service. Every possible care has been exercised in its design and construction. If any defect in workmanship or material should develop under conditions of normal use and service, any necessary repairs, including parts and labor will be made at NO CHARGE to the purchaser providing that our inspection reveals parts were not damaged through accident, alteration, misuse, abuse or other causes beyond our control. We neither assume nor imply any oral or statutory warranties, and we neither assume nor authorize any person to assume for us any obligation or liability in connection with this trigger. Repairs or disassembly of this trigger in any manner without specific authorization, voids the guarantee.

**IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON
WWW.TIMNEYTRIGGERS.COM OR CONTACT US**

Need help with your install? Contact our customer service team via phone or email for assistance.

Phone: 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

INSTALLATION INSTRUCTIONS

- 1** Before beginning work on any firearm, remove the ammunition source and double check to insure the chamber is empty
- 2** Remove receiver and barrel from the stock
- 3** Remove the take down screw just forward of the magazine and remove the receiver and barrel from the stock. Some 10/22s have a barrel band that must also be removed.
NOTE: Once the receiver and barrel is removed from the stock the receiver and barrel should look like Diagram A
- 4** Remove the two cross pins from the receiver as illustrated in Diagram B. The OEM trigger guard will now slide out the bottom of the receiver as shown
- 5** Insert your new Timney Trigger and previously removed cross pins into the receiver as illustrated in Diagram C.
NOTE: The Ejector must be seated fully in the slot of the receiver housing
- 6** Replace receiver and barrel back into the stock and secure take down screw and barrel band if necessary to complete installation
- 7** Perform trigger function test
- 8** You are now ready to enjoy your new Timney Trigger

DIAGRAM A

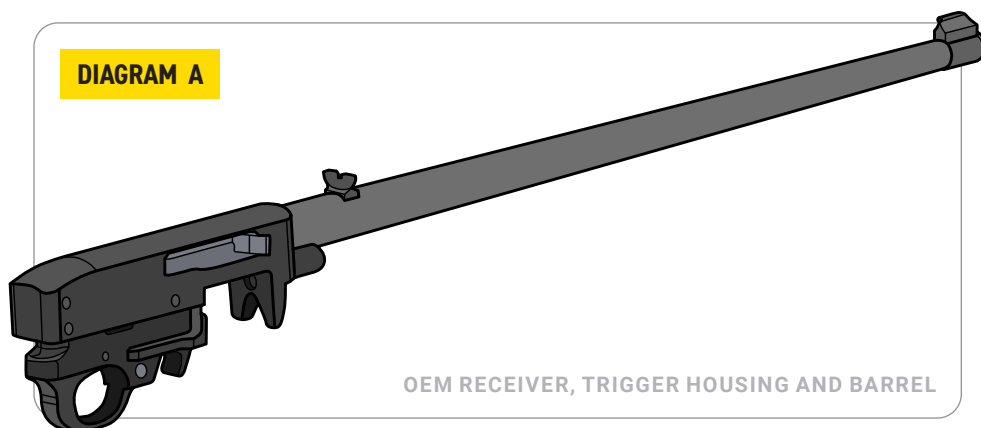


DIAGRAM B


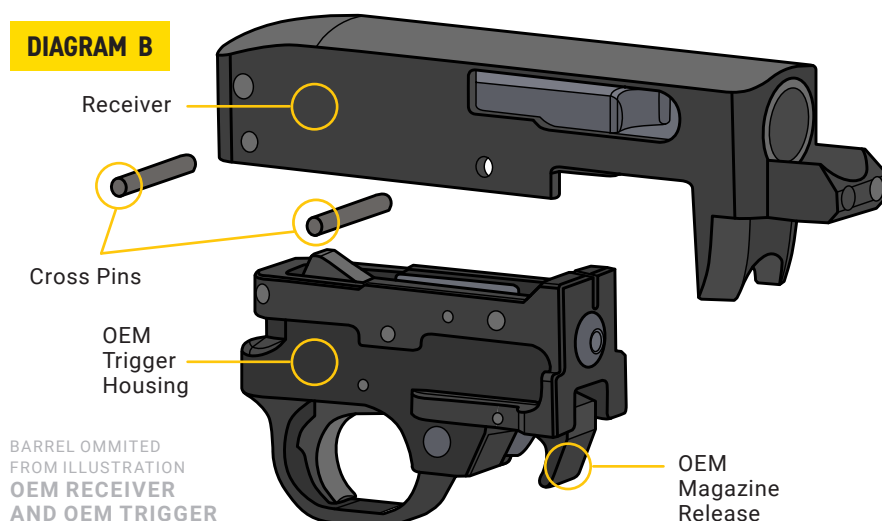


DIAGRAM C

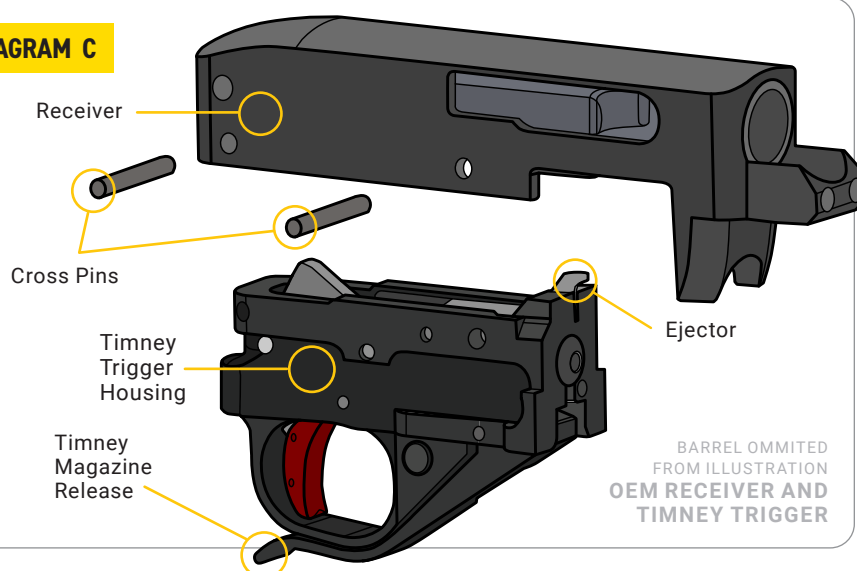

IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON WWW.TIMNEYTRIGGERS.COM OR CONTACT US

Need help with your install? Contact our customer service team via phone or email for assistance.

Phone: 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

